



Direct Print Module
Continuous Mode

DPM III c53
DPM III c107



DPM III c53 Direct Print Module – Continuous Mode

DPM III c107

Print	DPM III c53	DPM III c107
Print width	53 mm	106,6 mm
Transmission width (frame)	on demand	on demand
Print length	3000 mm / 2000 mm**	1500 mm / 1000 mm**
Print head	Corner Type	Corner Type
Resolution	300 dpi	300 dpi
Print speed	350 mm / sec.	300 mm / sec.

Built-in Printer Fonts

Scaleable Fonts	Helvetica Bold and Roman, Swiss light, Baskerville, Brush Script
Bitmap Fonts	6
Proportional Fonts	6

Barcodes	EAN 8, EAN 13, EAN 128, EAN ADD-ON, UPC-A, UPC-E, Code 39, Code 39 extended, Code 93, Code 128A, ITF 14/16, Code 128B, Code 2/5 inter-leaved, CODABAR, Pharmacode, PZN-Code, Leitcode, Identcode 2D Bar Codes PDF 417, Datamatrix, MAXICODE
-----------------	--

Pneumatic connection	min. 6 bar dry and free of oil
-----------------------------	--------------------------------

Interfaces

Serial	RS-232 C, 2400...57600 Baud RS-422* RS-485*
Parallel	Centronics (SPP and ECP)
USB	1.1
Ethernet/LAN	interne 10/100 Base-T*

Thermal Transfer Ribbon

Core diam.	25,4 mm / 1"
Max. length	600 m
Inkside	out

Dimensions	Breite x Höhe x Tiefe
without mounting frame	200 x 144 x 218 mm 200 x 144 x 273 mm
with mounting frame	depends on transmission width
Control unit	130 x 350 x 285 mm

Weight

Print mechanics	4 kg	5 kg
Mounting frame 230 mm	9 kg	
Control unit	10,5 kg	

Power requirements

Voltage	230 V/50 Hz 115 V/60 Hz*
Power consumption	max. 360 VA


Environmental (operating)

Temperature	5 – 45 °C
Humidity	max. 80%

* optional

** with option Ethernet/LAN

Carl Valentin GmbH
 Neckarstrasse 78 – 80
 D-78056 Villingen-Schwenningen
 Phone ++49 (0) 77 20 / 9712-0
 Fax ++49 (0) 77 20 / 9949871
 E-Mail: vertrieb@valentin-carl.de
 Internet: www.valentin-carl.de

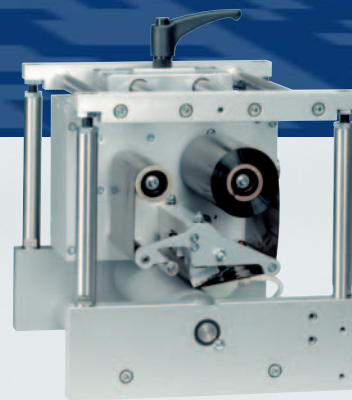

The DPM III c which operates in continuous mode is a direct print module which can be freely programmed. The module has a high resolution and can be installed in horizontal as well as in vertical packaging machines. Because of the availability of left and right hand versions, various print widths as well as a separate control unit from the print mechanics, a perfect integration into already existing packaging machines can be guaranteed. By means of the Windows printer driver which is included in our delivery or by our reliable creation software Labelstar PLUS a flexible labelling of packaging foils is possible.

Standard configuration

CD-ROM incl. Windows printer driver and user manuals for the printer

Transfer ribbon saving

Left or right hand version available

Multi-tasking operating system

Two-line, multi-language display

2-slot PCMCIA drive

Real-Time Clock / Calendar

Keyboard jack – for standard PS 2/AT computer keyboard

Interface for machine automation

Options

PCMCIA-Cards 256 KB, 512 KB, 1 MB, 2 MB

Mounting frame

Encoder



manufactured according to
 EN 60950, EN 50082, EN 55011

Printed in Germany 10/02

Modification subject to change